




Corrosion resistant die-cast aluminium body. Only to be used with electronic Led driver. Mains voltage 220-240V / 50-60hz. Clever thermal design. Suitable for illumination up to 8-12 meter height. Dali control option available. Easy mounting possibility

with mounting bracket. Reliable system with L80 B10 lifetime parameters.

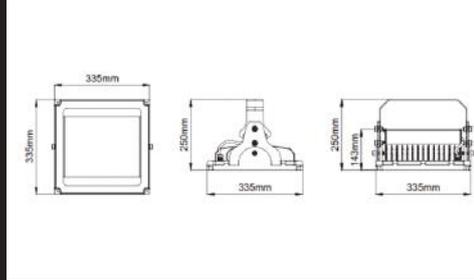

Technical Details

Item	Power(W)	Description	Light Output (Lm)	Dimensions (mm)
AUG1	60	Aura Highbay Gear 1	7320	335-335-100
AUG2	90	Aura Highbay Gear 2	10980	335-335-100
AUG3	120	Aura Highbay Gear 3	14640	335-335-100
AUG4	140	Aura Highbay Gear 4	17080	335-335-100

Technical Features

Installation	: Surface
Warranty	: 5 Years
Lamp Type	: LED
Housing	: Aluminium
Glass	: Tempered Glass
IP	: 65
Kelvin	: 3000-4000-6500
CRI	: >80
Led Lifetime	: 50.000 h
Power Supply	: 110-240V 50-60Hz
Op. Temp.	: -20°C / +45°C

Quality Certificate



Scan to View Catalog



www.edelight.com

Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.

Head Office & Factory

İkitelli OSB Mah. Dersan A Blok Sk. Trios 2023, A Blok No:1, İç Kapı No:47

34490 Başakşehir / İstanbul / Türkiye

Phone: +90 212 812 03 27 E-mail: info@edelight.com

Copyright © 2026 by Edea Elektrik Aydınlatma Dış Ticaret Ltd. Şti.